

Precision Motorized Stages with built in Glass-scale Encoder

Stage Size 165 × 165 mm / 165 × 220 mm / 165 × 420 mm

HST(GS)

RoHS

CE

Linear scales consist of “scales” used as a ruler and a “detector” which obtains positional information from the scales.



- Linear scales are used in indispensable processes in many fields, and mainly used in equipment for manufacturing electronic devices such as semiconductors, flat panel displays (FPD), and printed wiring boards, electronic component mounting machine, machine tools, and carrier machine.

Guide

- Interpolated resolution of the glass scale is set to 0.05μm.
- Contact our sales team about custom configurations.

Attention

- When operating the HST(GS) series with closed loop control, in order to use it within the specifications listed in the catalog, the number of motor divisions of the controller is recommended to be set to 100 or higher (travel per pulse is 0.05μm or less).

Specifications

Part Number		HST(GS)-50X	HST(GS)-100X	HST(GS)-200X
Mechanical Specifications	Travel [mm]	50	100	200
	Stage Size [mm]	165×165	165×220	165×420
	Feed Screw	Ball screw diameter φ10mm, 2mm lead	Ball screw diameter φ10mm, 2mm lead	Ball screw diameter φ10mm, 2mm lead
	guide	Crossed roller guide	Crossed roller guide	Crossed roller guide
	Stage Material	Steel	Steel	Steel
	Weight [kg]	8.8	10.7	18.9
Accuracy Specifications	Resolution	(Full) [μm/pulse]	4	4
		(Half) [μm/pulse]	2	2
	MAX Speed [mm/sec]		10	20
	Positioning Accuracy [μm]		3	5
	Positional Repeatability [μm]		0.5	0.8
	Load Capacity [N]		392 (40.0kgf)	392 (40.0kgf)
	Moment Stiffness	Pitch [°/N·cm]	0.01	0.01
		Yaw [°/N·cm]	0.01	0.01
		Roll [°/N·cm]	0.005	0.005
	Lost Motion [μm]		0.5	0.5
	Backlash [μm]		1	1
	Parallelism [μm]		50	100
	Running Parallelism [μm]		10	20
	Pitch [°] / Yaw [°]		15/15	20/20
Sensor	Sensor Part Number			
	Micro photo sensor: GP1S092HCPIF (Sharp Corporation)			
	Limit Sensor		Equipped (NORMAL CLOSE)	Equipped (NORMAL CLOSE)
	Origin Sensor		Equipped (NORMAL OPEN)	Equipped (NORMAL OPEN)
	Proximity Origin Sensor		Equipped (NORMAL OPEN)	Equipped (NORMAL OPEN)

Motor / Sensor Specifications

Motor	Type	5-phase stepping motor 1.4A/phase (Oriental Motor Co., Ltd.)		
	Motor Part Number	PKP544N18B (□42mm)	PKP544N18B (□42mm)	PKP546N18B (□42mm)
	Step Angle	0.72°		
Sensor	Power Voltage	DC5 – 24V ±10%		
	Current Consumption	80mA or lower (20mA or lower per sensor)		
	Control Output	NPN open collector output DC30V or lower, 50mA or lower		
	Output Logic	When shaded: Output transistor OFF (no conduction): Limit sensor When shaded: Output transistor ON (conduction): Origin sensor, Proximity Origin Sensor		
Scale head	Power Voltage / Current Consumption	DC5V±5% / 100mA		

Compatible Cable

Cable	Driver Cable	D15D15A-CA
	Scale Cable	GSEF-CA-3

Compatible Controller

Compatible Controller	SHOT-302GS, SHOT-304GS, HIT-M·HIT-SH
-----------------------	--------------------------------------

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Controllers/Drivers

Softwares

Stepping Motor

AC Servo Motor

Cables

Piezo

X Translation

Theta Rotation

Goniometer

Vacuum

Options

40 × 40 mm

60 × 60 mm

80 × 80 mm

85 × 85 mm

100 × 100 mm


120 × 120 mm

Others




Outline Drawing


HST(GS)-50X Hexagon socket head cap screw M6×15...4 screws

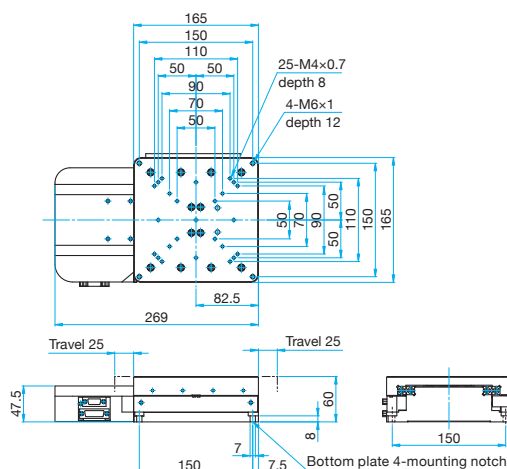


HST(GS)-100X Hexagon socket head cap screw M6×15...4 screws

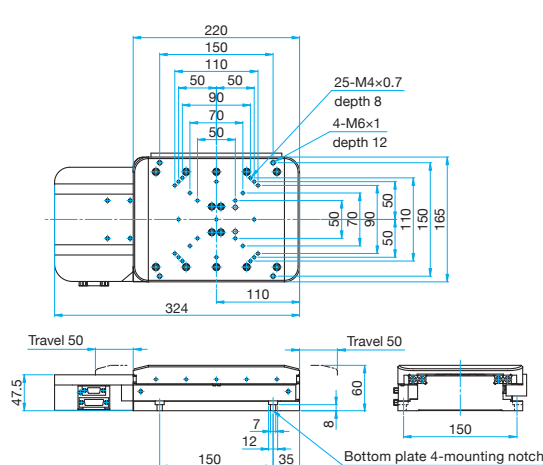


HST(GS)-200X Hexagon socket head cap screw M6×15...8 screws

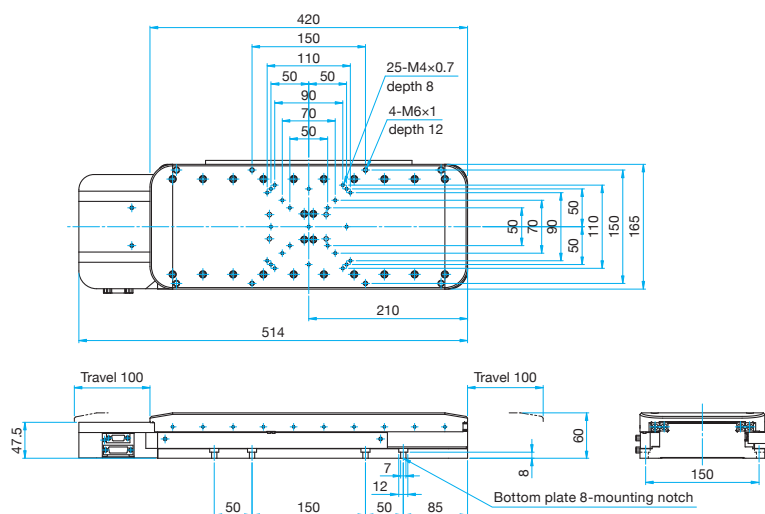

Connection Diagram

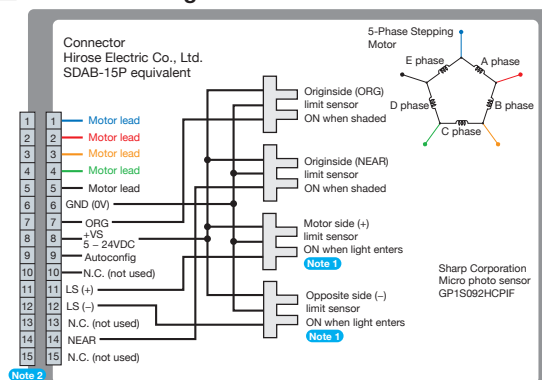

Compatible Controllers / Cables

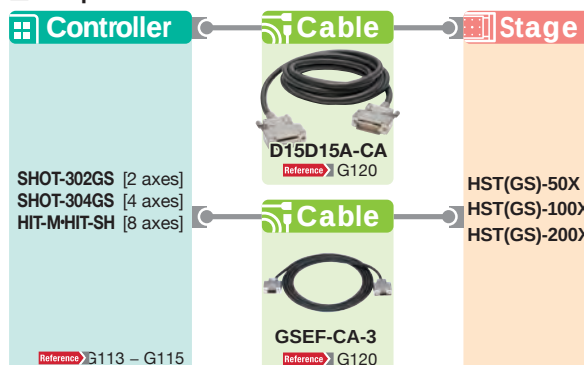

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

Controllers/Drivers

Softwares

Stepping Motor

AC Servo Motor

Cables

Piezo

X Translation

Theta Rotation

Goniometer

Vacuum

Options

40 × 40 mm

60 × 60 mm

80 × 80 mm

85 × 85 mm

100 × 100 mm

120 × 120 mm

Others