


Rotation Stages

Rotation Stages with Square Top


The KSC stage is Light weight, simple rotation stage. Manually positioned using handle with lock for securing position after adjustment.

The KSSA stages are fine rotation stages having a square table top. These stages are suitable for making minute angle adjustment in applications where a minimal footprint is desired.

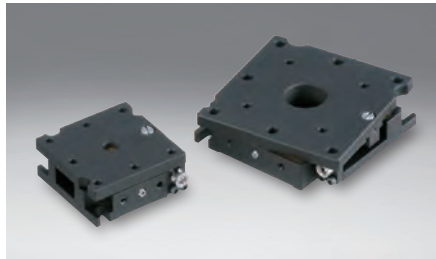


Outline Drawing

KSC-606 Hexagonal socket head cap screw M4x8...4 screws

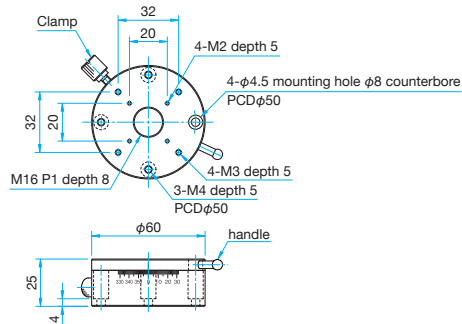


KSSA-256


-  Hexagonal socket head cap screw M2x8...3 screws,
One 3mm hex wrench with knob, One 0.89mm hex wrench
-  Wrench size for adjustment 3mm, Wrench size for clamp 0.89mm

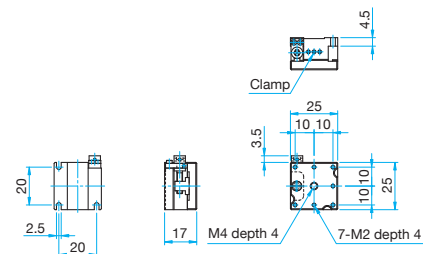**KSSA-406**

- Hexagonal socket head cap screw M3×8...3 screws,
One 3mm hex wrench with knob, One 1.5mm hex wrench
-  Wrench size for adjustment 3mm, Wrench size for clamp 1.5mm

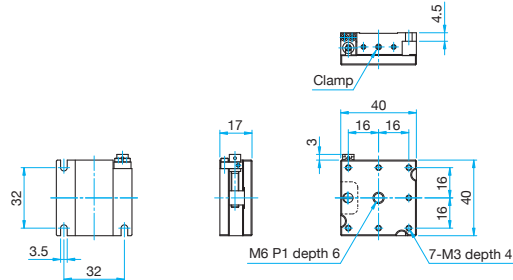**KSSA-606**

-  Hexagonal socket head cap screw M4x8...3 screws,
One 3mm hex wrench with knob, One 1.5mm hex wrench
-  Wrench size for adjustment 3mm, Wrench size for clamp 1.5mm

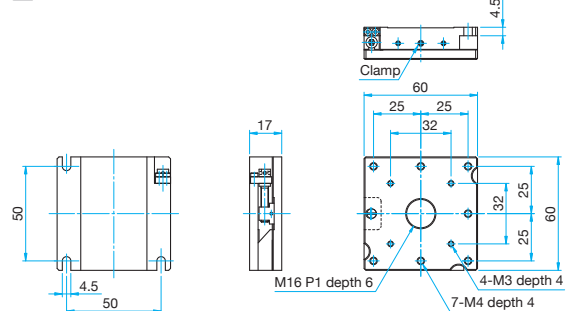

Specifications

Part Number	METRIC	KSC-606	KSSA-256	KSSA-406	KSSA-606
Stage Size [mm]		φ60	25×25	40×40	60×60
Rotation Range [°]		360	±3	±5	±7
Scale Readable Resolution		1°	—	—	—
Micrometer Readable Resolution [°]		—	about 3.18	about 1.92	about 1.47
Guide Method		Lapping method	Dovetail method		
Primary Material		Aluminum	Brass		
Finish		Black anodized	Super black chrome		
Load Capacity [N]		68.6 (7.0kgf)	29.4 (3.0kgf)	49.0 (5.0kgf)	68.6 (7.0kgf)
Max. Moment Capacity [N·m]		—	—	—	—
Moment Stiffness [°/N·cm]		1.5	2.0	1.5	1.0
Parallelism [μm]		50	50	50	50
Eccentricity [μm]		20	—	—	—
Wobble [μm]		20	—	—	—
Weight [kg]		0.19	0.09	0.23	0.5

* When using the M3 or M4 screws in the screw hole on the top surface of this stage, please use the screws within the length of the tap depth. There is a risk of damaging the sliding surface.