

Rectangular mirrors can be bonded to the front plate and circular mirrors can be bonded or held with the mirror adapters (MKAD).

- MKAD adapters allow for easy removal and mounting of circular mirrors.
- Two baseplate versions are available. MMHN-25L type has the mounting holes on the mirror side, and MMHN-25R type has mounting on the adjustment screw side.
- To align the reflective surface of the mirror to the mounting post axis use MMHN-25LRO mirror holders.



Guide


- ▶ 25mm square aluminum flat mirrors (TFA-25S05-10) are available.
[WEB Reference](#) [Catalog Code](#) W3403

Attention


- ▶ The adjustment is not along the reflective surface of the mirror. Gimbal mirror holders (MHAN) have the adjustment along the reflective surface the mirrors. [Reference](#) C024

Outline Drawing


MMHN-25L

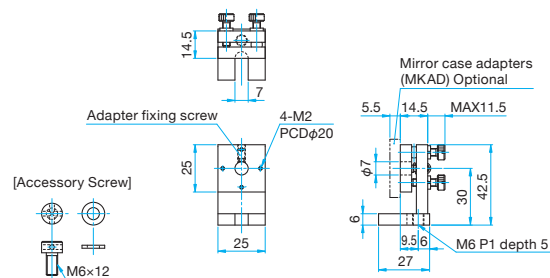


MMHN-25R

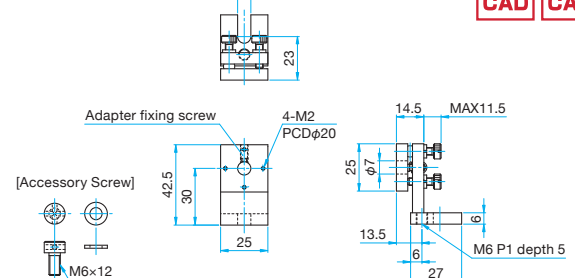


MMHN-25LRO

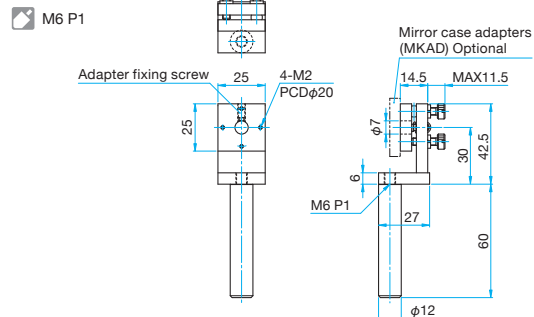

MMHN-25RRO

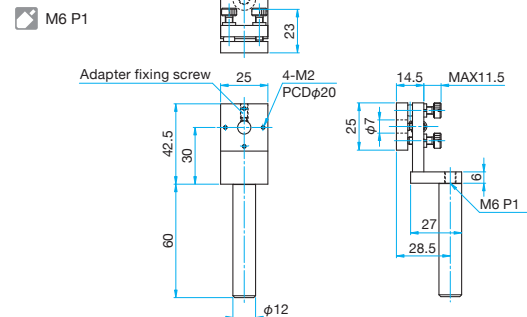

MMHN-25BN

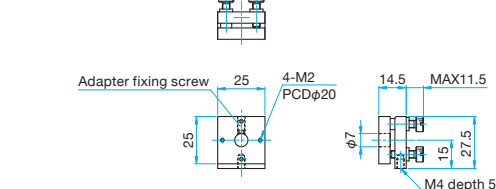

Specifications							Primary material: Aluminum Finish: Black Anodized
Part Number	Options specified*	Compatible Optics Diameter [mm]	Adjustment Range		Resolution		Weight [kg]
			Tilt [°]	Rotation [°]	Tilt [°/rotation]	Rotation [°/rotation]	
MMHN-25L	EE/UU	□25 or less φ25 or less	±5	±5	about 0.9	about 0.9	0.04
MMHN-25R	EE/UU		±5	±5	about 0.9	about 0.9	0.04
MMHN-25LRO	—		±5	±5	about 0.9	about 0.9	0.09
MMHN-25RRO	—		±5	±5	about 0.9	about 0.9	0.09
MMHN-25BN	—		±5	±5	about 0.9	about 0.9	0.03

* For specifying options, please refer to "Conversion of Posts, Post Holders and Pedestal Bases of Holders". [Reference](#) C007

Option Mirror Adapters | MMHN-MAD

RoHS Catalog Code W4133




Can be used to change the mounting position of mirrors relative to the mirror holder.

- Round and rectangular reflective optics can be fixed.
- With nine fixed screw holes with 10mm interval, can easily achieve 10mm offset adjustment.
- The optics can be held at three points on the side.

Outline Drawing


MMHN-25CMAD

Hexagonal socket head cap screw M2×3...3 screw

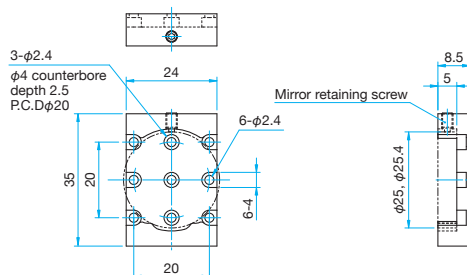

MMHN-25SMAD

Hexagonal socket head cap screw M2×3...3 screw

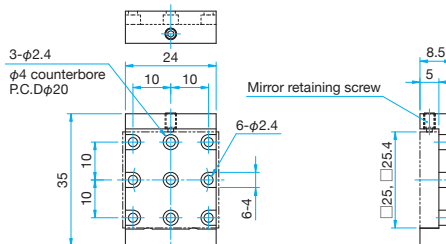

Specifications			Primary material: Aluminum Finish: Black Anodized
Part Number	Compatible Optics Dimensions [mm]	Weight [kg]	
MMHN-25CMAD	φ25, φ25.4	0.01	
MMHN-25SMAD	□25, □25.4	0.01	

Option Mirror Cells | MKAD

RoHS Catalog Code W4122


Mirror cells provide a method of mounting mirrors in compact mirror holders (MMHN-25) without adhesive.

- A split from provides a spring force to maintain a secure grip on mirrors inserted into these cells.
- To remove the mirror, push the mirror out by turning the M4 resin tipped setscrew clockwise.



Outline Drawing

MKAD

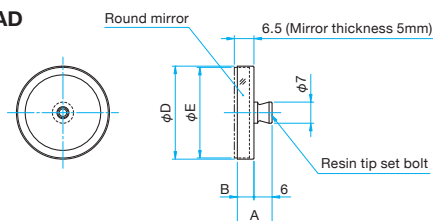

Specifications							Primary material: Aluminum Finish: Black Anodized
Part Number	Compatible Optics Diameter [mm]	A [mm]	B [mm]	Min Mirror Thickness [mm]	φD [mm]	φE [mm]	Weight [kg]
MKAD-12.7	φ12.7	10.5	4.5	3	φ13.4	φ12.7 ^{+0.15} _{-0.1}	0.002
MKAD-19.05	φ19.1	12	6	4.5	φ19.9	φ19.1 ^{+0.15} _{-0.1}	0.003
MKAD-25.4	φ25.4	11.5	5.5	4	φ26.1	φ25.4 ^{+0.15} _{-0.1}	0.005
MKAD-30	φ30	11.5	5.5	4	φ30.8	φ30 ^{+0.15} _{-0.1}	0.006