




Outline Drawing


OBC-1216

Hexagonal socket headcap screw M6×10...8 screws, M4×12...4 screws

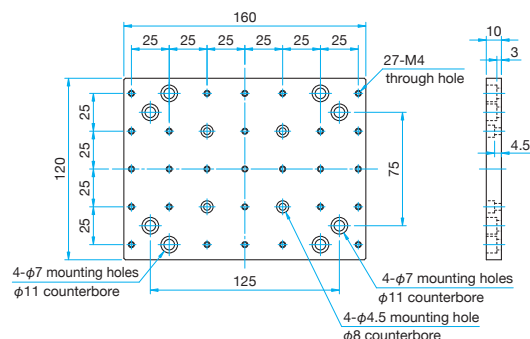


OBC-1230

Hexagonal socket headcap screw M6×10...8 screws, M4×12...4 screws

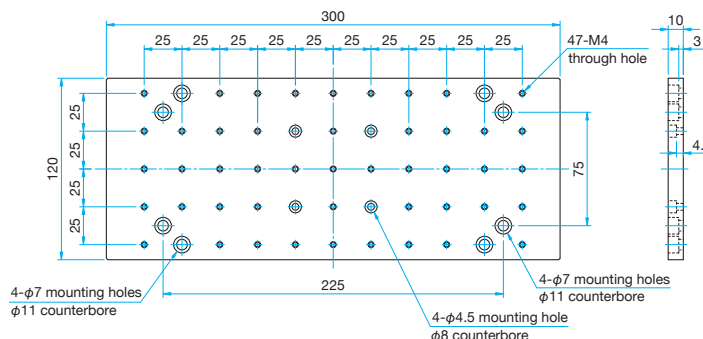

OBC-2030

Hexagonal socket headcap screw M6×10...8 screws, M4×12...4 screws

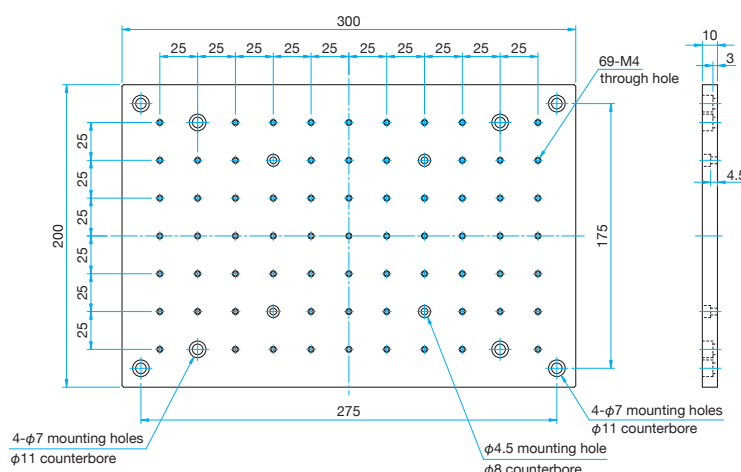

Specifications

Specifications			Primary material: Aluminum Finish: Black Anodized
Part Number	Size [mm]	Tapped Holes on Top Surface	Weight [kg]
OBC-1216	120×160	M4	0.48
OBC-1230	120×300	M4	0.93
OBC-2030	200×300	M4	1.58

MSP-25

RoHS Catalog Code **W6034**


Spacers for 25mm positioning stages.



- These spacers allow users to increase the height (thickness) of stages.
- Various thicknesses are available in 5mm increments.

Outline Drawing

MSP-25

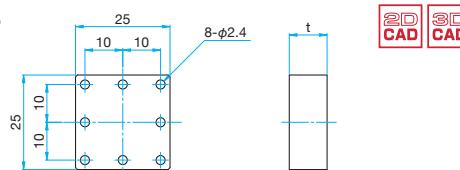

Specifications

Specifications			Primary material: Aluminum Finish: Black Anodized
Part Number	Thickness t [mm]	Weight [kg]	
MSP-2505	5	0.008	
MSP-2510	10	0.016	
MSP-2515	15	0.024	

Guide

- Custom sizes not listed in the catalog can be purchased. Contact our Sales Division for more information.

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

Vibration Isolation Systems

Optical Tables

Darkrooms/ Dark Boxes

Optical Bases

Posts

Brackets

Adapters

Tools