

Long travel, high stiffness precision motorized stages with built-in compact optical scales make highly accurate and reliable full closed loop system using Sigma-Koki controllers (SHOT-302GS/304GS, HIT-M·HIT-S)



- U-shaped guide rail offers light weight, and minimized deflection to achieve high stiffness.
- Includes a compact scale built in while keeping the installation space the same as that of the equivalent open loop OSMS series.

Guide

- ▶ Contact our Sales Division for replacement of motors or for stabilizing (drop-preventing) mechanism.
[Reference](#) G017, G123 (Motorized Stage System Question Sheet)
[WEB Reference](#) [Catalog Code](#) W9500
- ▶ Grease change is optionally available.
[Reference](#) G122 [WEB Reference](#) [Catalog Code](#) W9006
- ▶ Contact our International Sales Division to use the stage as an XY axis or a Z axis stage.

Specifications

Part Number		OSMS(CS)33-300(X)	OSMS(CS)33-500(X)
Part Number (-M6)		OSMS(CS)33-300(X)-M6	OSMS(CS)33-500(X)-M6
Part Number (-INCH)		OSMS(CS)33-300(X)-INCH	OSMS(CS)33-500(X)-INCH
Mechanical Specifications	Travel [mm]	300	500
	Stage Size [mm]	120×120	120×120
	Feed Screw	Ball screw diameter ϕ 10mm, 10mm lead	Ball screw diameter ϕ 10mm, 10mm lead
	Positioning Slide	Outer rail structure	Outer rail structure
	Stage Material	Aluminum	Aluminum
	Finish	Black anodized	Black anodized
	Weight [kg]	7.8	9.6
Accuracy Specifications	Resolution	(Full) [μ m/pulse]	20
		(Half) [μ m/pulse]	10
	MAX Speed [mm/sec]	100	100
	Positioning Accuracy [μ m]	25	25
	Positional Repeatability [μ m]	5	5
	Load Capacity [N]	196 (20.0kgf)	196 (20.0kgf)
	Moment Stiffness	Pitch [$^{\circ}$ /N·cm]	0.12
		Yaw [$^{\circ}$ /N·cm]	0.08
		Roll [$^{\circ}$ /N·cm]	0.1
	Lost Motion [μ m]	5	5
	Backlash	3	3
	Parallelism [μ m]	50	50
	Running Parallelism [μ m]	15	25
Sensor	Pitch [$^{\circ}$] / Yaw [$^{\circ}$]	40/25	40/25
	Sensor Part Number	Micro photo sensor: GP1S092HCPIF (Sharp Corporation)	
	Limit Sensor	Equipped (NORMAL CLOSE)	Equipped (NORMAL CLOSE)
	Origin Sensor	Equipped (NORMAL OPEN)	Equipped (NORMAL OPEN)
	Proximity Origin Sensor	Equipped (NORMAL OPEN)	Equipped (NORMAL OPEN)
Scale head	Resolution [μ m]	0.5	0.5

Motor / Sensor Specifications

Motor	Type	5-phase stepping motor 0.75A/phase (Tamagawa Seiki Co., Ltd.)
	Motor Part Number	TS3667N43E967 (□42mm)
	Step Angle	0.72°
Sensor	Power Voltage	DC5 - 24V $\pm$ 10%
	Current Consumption	80mA or lower (20mA or lower per sensor)
	Control Output	NPN open collector output DC30V or lower, 50mA or lower
	Output Logic	When shaded: Output transistor OFF (no conduction) : Limit Sensor When shaded: Output transistor ON (conduction): Origin sensor, Proximity Origin Sensor
Scale head	Power Voltage / Current Consumption	DC5V $\pm$ 5% / 100mA

Compatible Cable

Cable	Driver Cable	D15D15A-CA
	Scale Cable	GSEF-CA-3

Compatible Driver / Controller

Control System	Compatible Driver	—
	Compatible Controller	SHOT-302GS, SHOT-304GS, HIT-M·HIT-S

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Controllers/Drivers

Softwares

Stepping Motor

AC Servo Motor

Cables

Piezo

X Translation

Theta Rotation

Goniometer

Vacuum

Options

40 x 40 mm

60 x 60 mm

80 x 80 mm

85 x 85 mm

100 x 100 mm



120 x 120 mm

Others



Outline Drawing



OSMS(CS)33-*(X) Hexagon socket head cap screw M6×12...14 screws (300)
Hexagon socket head cap screw M6×12...22 screws (500)

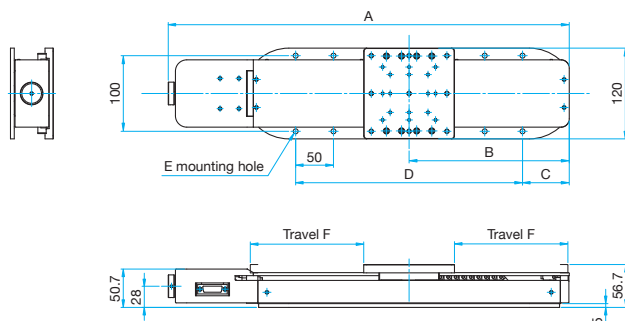

Mounting hole pattern of a top plate

Part Number	A	B	C	D	E	F
OSMS(CS)33-300(X)	530.3	211.8	61.8	300 (50×6)	14-φ6.5	150
OSMS(CS)33-500(X)	730.3	311.8	61.8	500 (5×10)	22-φ6.5	250



OSMS(CS)33-*(X)-M6 Hexagon socket head cap screw M6×12...14 screws (300)
Hexagon socket head cap screw M6×12...22 screws (500)

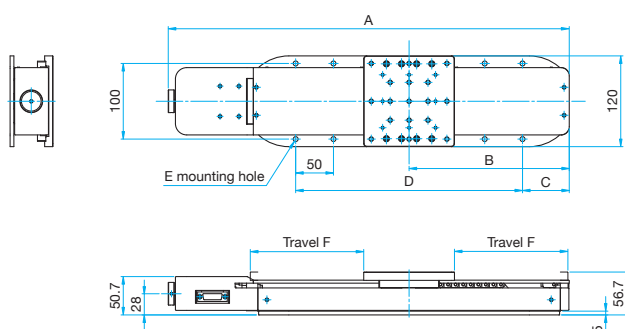

Mounting hole pattern of a top plate

Part Number	A	B	C	D	E	F
OSMS(CS)33-300(X)-M6	530.3	211.8	61.8	300 (50×6)	14-φ6.5	150
OSMS(CS)33-500(X)-M6	730.3	311.8	61.8	500 (5×10)	22-φ6.5	250


OSMS(CS)33-*(X)-INCH Hexagon socket head cap screw 1/4-20UNC×1/2...14 screws (300)
Hexagon socket head cap screw 1/4-20UNC×1/2...22 screws (500)

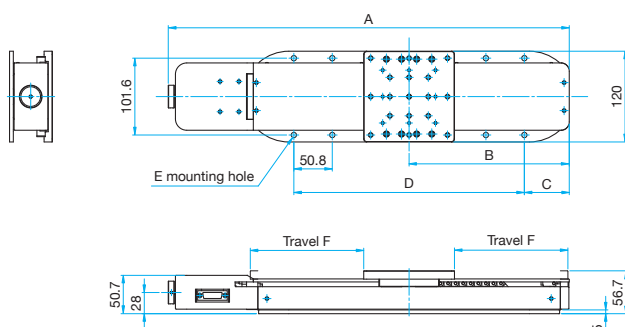

Mounting hole pattern of a top plate

Part Number	A	B	C	D	E	F
OSMS(CS)33-300(X)-INCH	530.3	211.8	59.4	304.8 (50.8×6)	14-φ7	150
OSMS(CS)33-500(X)-INCH	730.3	311.8	57.8	508 (50.8×10)	22-φ7	250

Compatible Controllers / Drivers and Cables

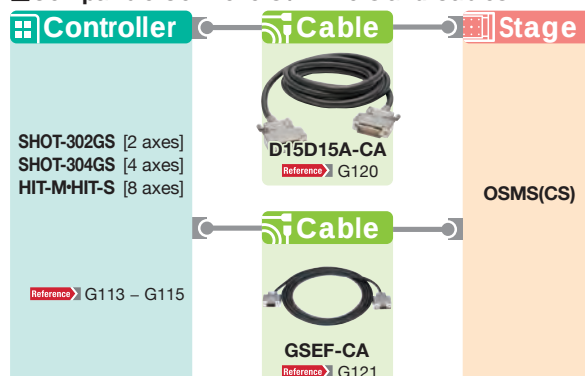

Application
Systems

Optics &
Optical
Coatings

Opto-
Mechanics

Bases

Manual
Stages

Actuators &
Adjusters

MotORIZED
Stages

Light Sources &
Laser Safety

Index

Guide

Controllers/Drivers

Softwares

Stepping Motor

AC Servo Motor

Cables

Piezo

X Translation

Theta Rotation

Goniometer

Vacuum

Options

40 × 40 mm
60 × 60 mm
80 × 80 mm
85 × 85 mm
100 × 100 mm
120 × 120 mm
Others