

Used for rotary and regular cross clamps.

- Can be combined with other posts via a cross clamp or rotary cross clamp.
- The PO-12 model is secured with a 17 mm wrench on the flats of the external thread.
- The PO-20 model is secured using a wrench inserted into the through hole.





Guide

- Custom sizes not listed in the catalog can be made to print. Contact our Sales Division for more information. Use the Question Sheet for Special Order Posts.

► WEB Reference Catalog Code W6053



Outline Drawing

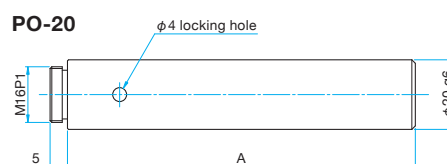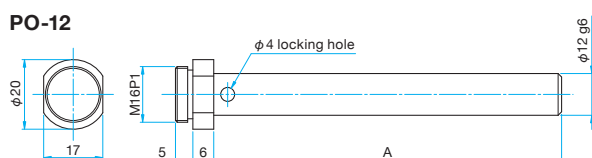

Specifications

			Primary material: Stainless Steel Finish: None
Part Number	Diameter [mm]	A [mm]	Weight [kg]
PO-12-100	φ12	100	0.11
PO-12-120		120	0.13
PO-12-150		150	0.15
PO-12-200		200	0.2
PO-12-250		250	0.24
PO-12-300		300	0.29
PO-12-400		400	0.38
PO-12-500		500	0.46
PO-20-100	φ20	100	0.25
PO-20-120		120	0.3
PO-20-150		150	0.37
PO-20-200		200	0.5
PO-20-250		250	0.62
PO-20-300		300	0.74
PO-20-400		400	0.99
PO-20-500		500	1.24



Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Vibration Isolation Systems

Optical Tables

Darkrooms/ Dark Boxes

Optical Bases

Posts

Brackets

Adapters

Tools