

X Axis Aluminum Translation Stages

XY Axis Aluminum Translation Stages

TADC-601


TADC-602W

Stage Size 60 × 60 mm

RoHS

Aluminum translation stage with high stiffness bearing ways. Cost effective and light weight.

- Unique steel bearing ways with 4-point extended contact yield stable load capacity in all directions.
- Long life, maintenance free.

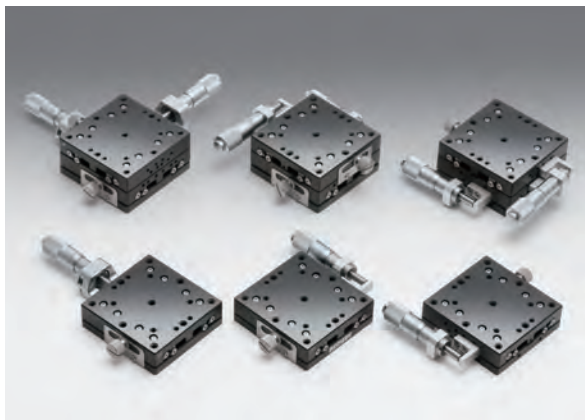

Attention

- Micrometer brackets may extend above the top surface of some stages. Check drawings for more information.

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Others

15 × 15 mm

25 × 25 mm

40 × 40 mm

60 × 60 mm

65 × 65 mm

80 × 80 mm

100 × 100 mm

120 × 120 mm

Others


Specifications

Part Number	METRIC	TADC-601C	TADC-601S	TADC-602WC	TADC-602WS
(Opposite Model)	METRIC	—	TADC-601SR	—	TADC-602WSR
Stage Size [mm]		60×60	60×60	60×60	60×60
Axes of Travel		X axis		XY axis	
Micrometer Position		Center	Side	Center	Side
Travel [mm]		±6.5	±6.5	±6.5	±6.5
Lead of Actuator [mm/rotation]		0.5	0.5	0.5	0.5
Micrometer Readable Resolution [mm]		0.01	0.01	0.01	0.01
Guide Method		Extended contact ball bearing guide			
Primary Material		Aluminum			
Finish		Black anodized			
Load Capacity [N]		196 (20.0kgf)	196 (20.0kgf)	196 (20.0kgf)	196 (20.0kgf)
Travel Accuracy	Straightness [μm]	3	3	3	3
Max. Moment Capacity	Pitch [N·m]	4.9	4.9	4.9	4.9
	Roll [N·m]	4.9	4.9	4.9	4.9
	Yaw [N·m]	4.9	4.9	4.9	4.9
Moment Stiffness	Pitch [°/N·cm]	0.3	0.3	0.6	0.6
	Roll [°/N·cm]	0.25	0.25	0.6	0.6
Parallelism [μm]		30	30	50	50
Running Parallelism [μm]		10	10	20	20
Orthogonality [μm]		—	—	10	10
Weight [kg]		0.2	0.2	0.4	0.4




Outline Drawing


TADC-601C Hexagon socket head cap screw (stainless steel construction) M4×6...4 screws

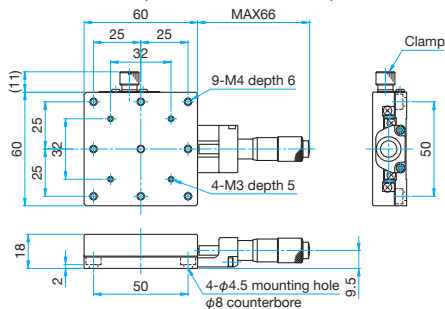


TADC-601S Hexagon socket head cap screw (stainless steel construction) M4×6...4 screws

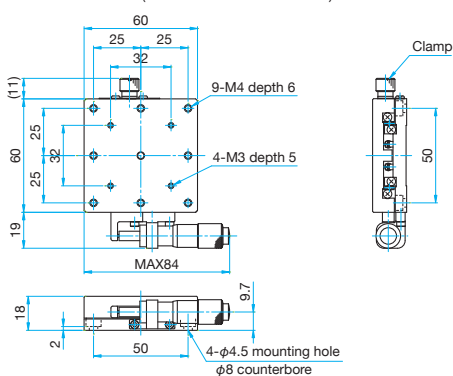


TADC-601SR Hexagon socket head cap screw (stainless steel construction) M4×6...4 screws

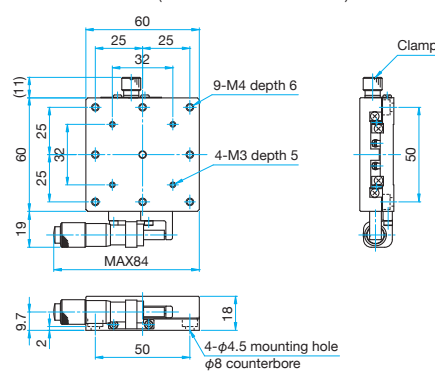


TADC-602WC Hexagon socket head cap screw (stainless steel construction) M4×6...4 screws

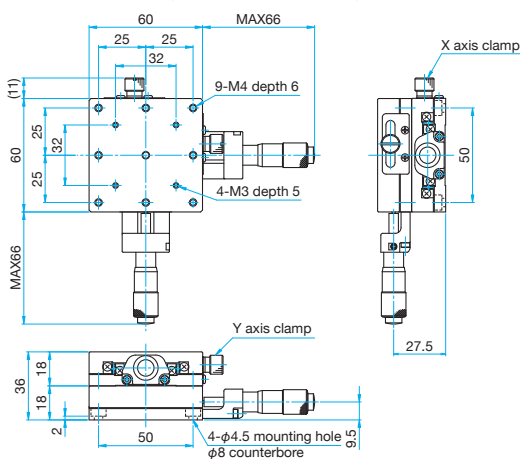

TADC-602WS Hexagon socket head cap screw (stainless steel construction) M4×6...4 screws

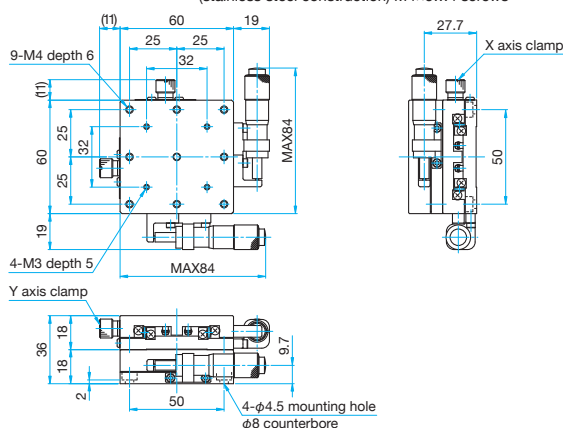

TADC-602WSR Hexagon socket head cap screw (stainless steel construction) M4×6...4 screws

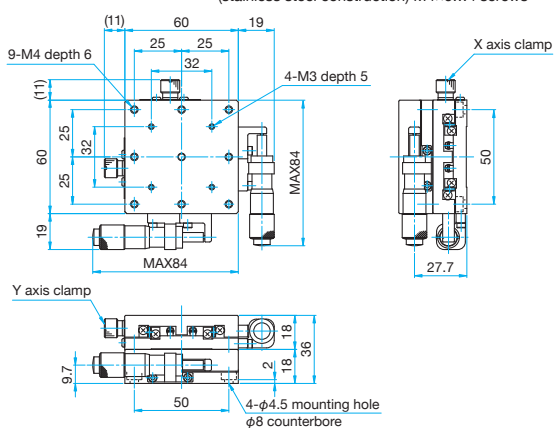

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Others

15 × 15 mm

25 × 25 mm

40 × 40 mm

60 × 60 mm

65 × 65 mm

80 × 80 mm

100 × 100 mm

120 × 120 mm

Others