Helicoidal Post Holders Clamp Screws (For post holders)

RSN RS-CB





Helicoidal Post Holder.

 Turning the height-adjustment rotary section allows movement of 10mm (about 5mm/ rotation) in the Z direction.

• To secure a post, insert the post into the post holder, and clamp it down using the two clamp screws on the side of the main body. The upper clamp screw on the side of the main body is designed to secure a post, and the lower clamp screw is designed to secure a helicoid ring.


• The helicoid screw allows for Z travel of a post without rotating the post.

2D 3D CAD

Attention

▶ Turning the height adjustment rotary section excessively may cause locking.

Specification	ns	Primary material: Aluminum Finish: Black Anodized		
Part Number	Inner Diameter [mm]	Diameter [mm]	Weight [kg]	
RSN-12	φ12	φ30	0.16	
RSN-12.7EE	φ12.7	φ30	0.16	
RSN-12.7UU	φ12.7	φ30	0.16	
RSN-20	φ20	φ38	0.21	

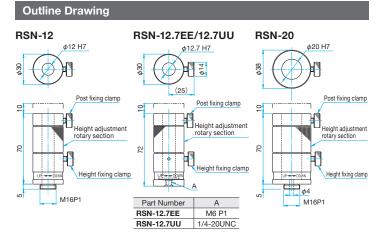


RS-CB

RoHS Catalog W6046

Clamps for high stability ball plunger post holders (BRS-12, BRS-20) and post holders (RS-12, RS-20, RS-30).

- Used to secure posts inserted in post holders.
- Three of these clamp screws can be used on the RS model post holders for maximum holding strength.





Guide

► High Stability Plunger Post Holders (BRS) Reference D060 WEB R ce Catalog Code W6043

Post Holders (RS)

ence D061 WEB Ref ence Catalog Code W6044

Attention

▶This product is delivered only by mail.

Specifications	Primary material: Brass Finish: Chrome Plated		
Part Number	Quantity [Pieces]		
RS-CB	5		



Optics & Optical Coatings

Opto-Mechanics

Bases

V	Ц		П	u	а	l
S	t	a	g	е	s	

Actuators & Adjusters

Motoeized **Stages**

Light Sources & Laser Safety

Index

Guide

Vibration Isolation Systems

Optical Tables

Darkrooms/ Dark Boxes

Optical Bases

Posts

Brackets

Adapters

Tools