

Vacuum Posts | VRO

Vacuum Posts | VRS

VRO


NEW
RoHS
Catalog Code
W6107


Low out-gassing rod for mounting vacuum compatible holder.

- By using in combination with vacuum post holders (VRS), optical axis height of the holders can be adjusted. [WEB Reference](#) **Catalog Code** W6100
- Screw hole grooving and vent hole processing are applied to prevent the out-gas emits when forming vacuum.
- Separately sold parts, vacuum screw (VSC/VCBS) can fix the M6 installing holders or M4 installing holders. [WEB Reference](#) **Catalog Code** W6110

Outline Drawing

VRO

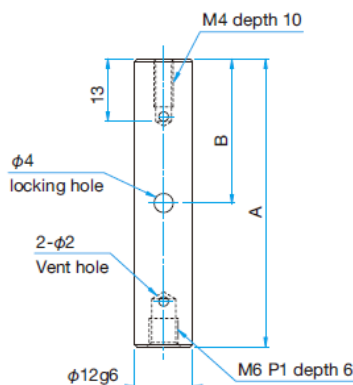

Guide

- ▶ We deliver the item with specialized vacuum packaging to keep its high clean state from the factory to the destination.

Attention

- ▶ Please open the package in the clean environment. Please do not touch it by your bare hands.

Specifications

Primary material: Steel (**SUS316L**)
Finish: None

| Part Number | Height A [mm] | B [mm] | Weight [kg] |
|-------------|---------------|--------|-------------|
| VRO-12-30 | 30 | 17 | 0.026 |
| VRO-12-40 | 40 | 20 | 0.033 |
| VRO-12-60 | 60 | 30 | 0.049 |
| VRO-12-80 | 80 | 40 | 0.066 |
| VRO-12-100 | 100 | 50 | 0.096 |

VRS


NEW
RoHS
Catalog Code
W6100


Post holders for adjusting optical axis height of the holders with vacuum posts.

- Screw hole grooving and vent hole processing are applied to prevent the out-gas emits when forming vacuum.
- You can move the posts by loosening the height fixing clamp of the post holders.
- You can rotate the holders centering on the post without changing the optical axis height of holders because intermediate ring for prevention of falling of post is attached.

Outline Drawing

VRS

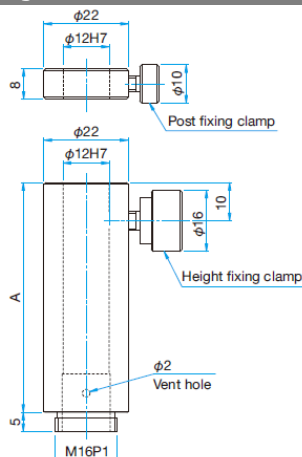

Guide

- ▶ We deliver the item with specialized vacuum packaging to keep its high clean state from the factory to the destination.

Attention

- ▶ Please open the package in the clean environment. Please do not touch it by your bare hands.

Specifications

Primary material: Steel (**SUS316L**)
Finish: None

| Part Number | Height A [mm] | Weight [kg] |
|-------------|---------------|-------------|
| VRS-12-30 | 30 | 0.10 |
| VRS-12-40 | 40 | 0.12 |
| VRS-12-60 | 60 | 0.16 |
| VRS-12-80 | 80 | 0.21 |
| VRS-12-100 | 100 | 0.25 |



Tokyo Head Office
5F, SIGMA KOKI Tokyo Head office 1-19-9,
Midori, Sumida-ku, Tokyo, 130-0021, JAPAN
TEL. +81-3-5638-8228
FAX. +81-3-5638-6550
E-mail international@sigma-koki.com

Osaka Branch
4-9-28 Nishi-Nakajima,
Yodogawa-ku, Osaka 532-0011
TEL. +81-6-6307-4835
FAX. +81-6-6307-4834
E-mail sales.osaka@sigma-koki.com

Kyushu Sales Office
3-17 Hie-machi, Hakata-ku, Fukuoka 812-0014
TEL. +81-92-481-4300
FAX. +81-92-481-4310
E-mail sales.kyushu@sigma-koki.com